


Oakwood Cemetery / Baldwin City, Kansas


Monument Foundation Requirements

- Prior to any work being done, the office must be contacted at 785-594-6907, then allow three business days before commencing work.
- The sexton will mark correct layout and location of the requested grave.
- NO above ground monuments or benches are allowed in the Howard Memorial section ALL grave markers must be set at ground level.
- Above ground monuments and markers are allowed in all other areas of Oakwood Cemetery.
- Concrete will be at least 4" thickness for monuments up to 24" in length, and 6" thickness for monuments 24 – 60" in length.
- Required 4" reveal of foundation pad around base of monument base.
- Pier holes will be a minimum of 30" in depth and approximately 7" diameter.
- All piers will have two (2) 3/8" rebar in every hole.
- The foundation/monument installer will be responsible for all cleanup and removal of all excavated dirt and other installation debris to the satisfaction of cemetery sexton.


Pier Hole Diagram Example

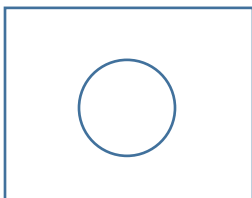

up to 24" = 1 pier

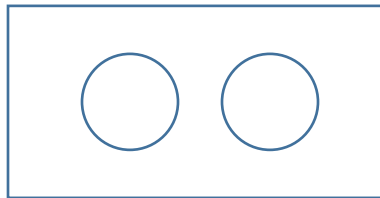

24" to 48" = 2 piers

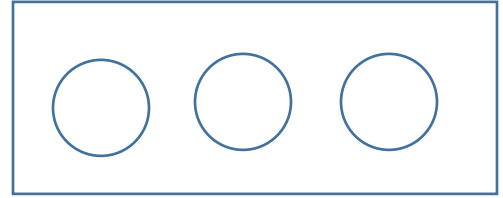

48" or over = 3 piers